

KLD-2162K

21.5inch Industrial Panel PC



Features

- Aluminum die-casting chassis, fanless design
- 21.5inch LED TFT LCD, capacitive touch
- Intel Baytrail Celeron J1900 2.0-2.42G CPU
- 4*COM, 2*LAN, 3*USB2.0, 1*USB3.0
- AT & ATX Model
- Front Panel IP65 Level
- DC 9~36V power input optional


Specifications

Processor	CPU	Intel Baytrail-D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W
	Cooling System	Fanless
	Memory	Onboard DDR3L, max 4GB
	Storage	1*mSATA SSD Full Size + 2.5inch SATA HDD
	I/O ports	3xUSB2.0+1xUSB3.0, Type-A
		COM: 4xRS232, DB9, 2*RS485 optional
		Dual Display: 1xHDMI (3840*2160 @30Hz) 1*VGA (1920*1200 @30Hz)
		Audio: 1xMic-in, 1x Line-out
		Expansion: MINI-PCIE
Input Voltage	Network(LAN)	2x 10/100/1000Mbps Ethernet
	Input Voltage	12V DC(Aviation Connector) , optional 9V-36V DC
LCD Display	Control SW/LED	Power Button, AT & ATX Model
	Display Type:	21.5inch TFT LED Panel(LED Backlight)
	Max. Resolution:	1920x1080/ 16:9
Touchscreen	Luminance(cd/m ²)	300-1000nits
	Touch Type	Capacitive Touch
OS Support	OS Support	Microsoft Windows 7/ Windows 8/ Windows 10/ Linux
Environment	Operating Temperature	-10°C ~ 60°C(14~ 140 °F)(extend temperature optional)

Mechanical	Storage Temperature	-20°C ~ 70°C(-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
	Dimensions	530x326.6x70.3mm, cutout size 513*303mm
	Weight	8KG N.W.
	Color	Black
	Material	Aluminum

Dimensions

Unit: mm

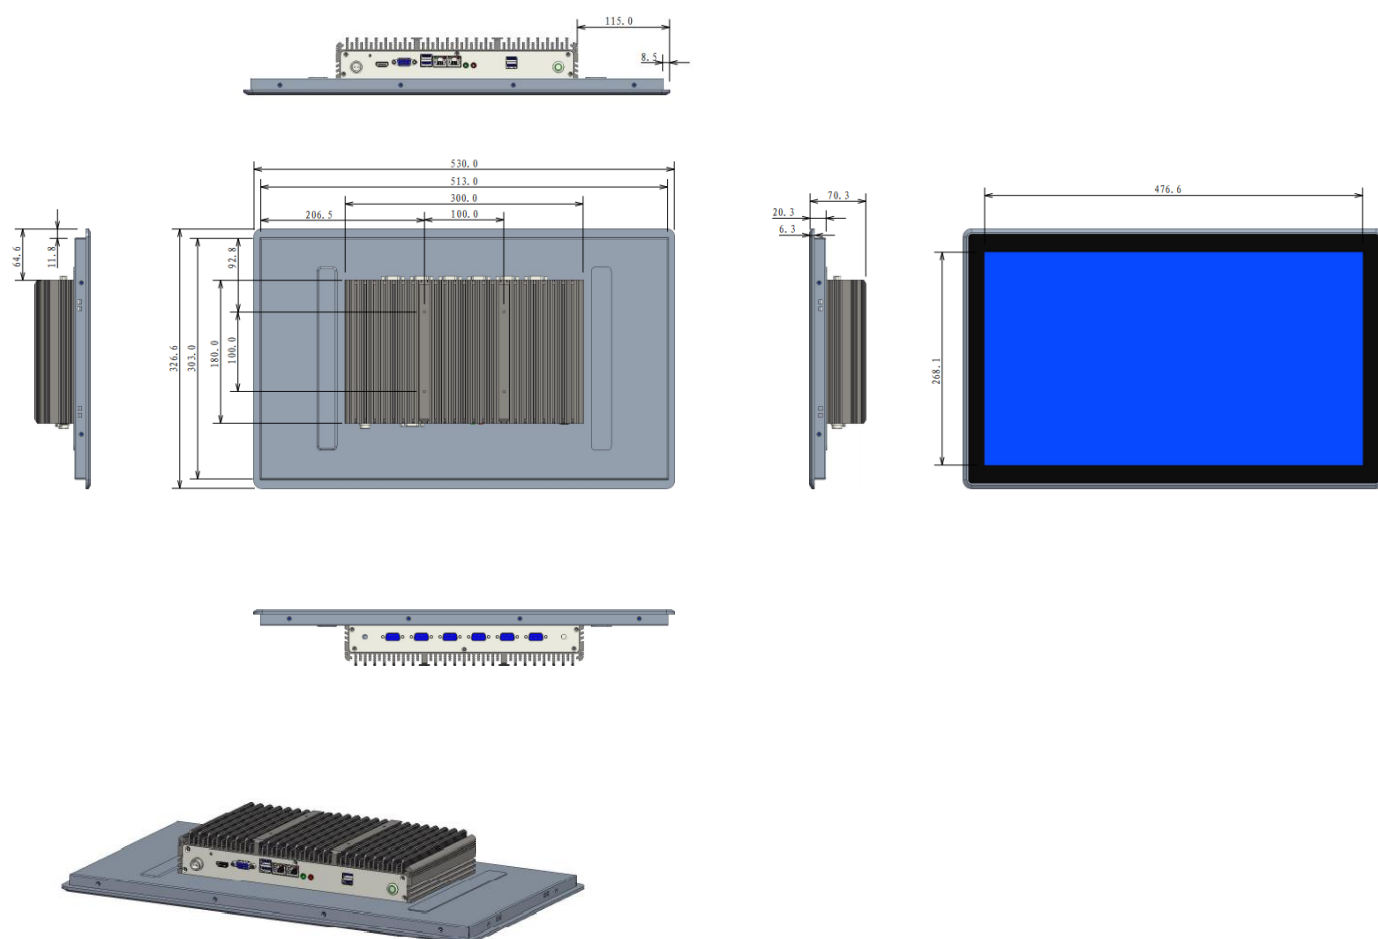



Packing List	Ordering Information
1x KLD-2162K	KLD-2162K: Projected Capacitive Touch Version
1x Driver CD	Operating Systems
1x Power Adapter	WIN7 32bit 64bit EN
Optional accessories	WIN8 32bit 64bit EN
VESA Bracket	WIN10 32bit 64bit EN
Power Cable 2-pin 200cm	Linux Ubuntu 12.04/16.04/18.04