

27" Capacitive Touch PC



Features

- Intel® Pentium® N4200 QuadCore CPU
- Anti-glare surface treatment (chemical etching)
- 10-Finger-Multi Touch Capacitive Touch Panel
- Optically bonded Touch Panel to LCD Panel
- Patented IP65 front with silicon seal
- Supports Windows 10 & Linux (32Bit, 64Bit)
- 2 year guarantee

Product name	27" Capacitive Touch PC
Model number / EAN number	FT27N42004G128CAPOB / 6920734002702

IP Rating	
IP65 Front / IP40 Back	

Screen diagonal (Inch/cm)	27/68.57
Display active screen size (cm)	59.76×33.62
Aspect ratio	16:9
Physical resolution	1920×1080
External Maximum showable resolution - HDMI, DP	1920×1200
Colours displayed	16.7M
Brightness (cd/m ²)	300
Contrast	3000:1
Typical reaction time Tr / Tf (ms)	7/5
Visual Angle horizontal / vertical (°)	178/178
Backlight / Backlight Lifetime (hours)	LED / 30,000

Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	8.00
Gross weight (kg)	10.50 (incl. cartontage)
Housing material	Rubber front case, A luminum IP C back case
Housing (mm) L × W × H	663.0 × 405.0 × 62.0
Cut-out for clamp supports (mm) L × H	639.0 × 381.0
Amount of clamps required	10
Mounting	VESA 100

Internal Connectors (occupied)		
1x SO-DIMM, max. 8GB, DDR3L 1333/1600/1867 non-ECC, Single channel memory		
3x RS232/RS485 COM connectors switchable in BIOS		
2x LCD Backlight control/LCD panel voltage box		
1x 5V/12V SATA power connector	1x 12V DC power connector (2-pin)	
1x 4-pin SATA power connector	1x S/PDIF output pin header	
1x 8-bit Digital I/O interface	1x Line-out / Mic-in header	
1x Front Panel box header	1x Serial ATA 6Gb/s	
1x MIPI CSI connector	1x LVDS box header	2x USB 3.0 box header

PC System	
CPU	Intel® Pentium® QuadCore N4200
Graphic GPU	Intel® HD Graphics
Audio	Realtek ALC3236 Audio CODEC
Memory	4GB DDR3L non-ECC (max. 8GB)
Storage (switchable)	faytech Industrial 128GB SSD
Network	2x Realtek PCIe GB LAN 8111G (1x optional with POE); W-LAN
Driver Support	Win10; Linux; 32Bit/64Bit
Preinstalled OS	Linux Ubuntu

Touch Panel	
Touch Technology	Projected Capacitive 10-Point Multitouch
Touch Connector	USB
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Surface Treatment	Anti-glare (chemical etching)

Power	
Power Indicator	Green LED
Power Supply	100-240V ACDC active switching; 12V DC-Out
Working Power (V)	12
Power Consumption (W)	42
Stand-By Consumption (W)	<1

External Connectors	
1x 12V DC-In (screwable)	
1x W-LAN antenna connector (RP-SMA male)	
2x USB 3.0	2x USB 2.0
1x HDMI	1x MIC-In & EAR-Out
1x 8-PIN DIO as RJ45	1x DP
2x COM port Full-PIN - RS232/485; 5V/12V	
2x COM port 3-PIN - RX, TX, GND; RS232/485; 5V/12V	
2x 10/100/1000Mbit RJ45 Ports	
1x S/PDIF-Out (1x Cinch, 1x Torx module)	
1x 2.5" module slot, changeable SSD included	



Expansion Slots
1x mSATA full size (occupied by SSD)
1x M.2 E-Key Slot (occupied by Wifi card)
1x SATA connector
1x External PCIe x1 Straddle connector

Included in the Delivery
Power Supply (see Power section)
W-LAN antenna (RP-SMA female)
Short Installation Manual
Standard Stand

Pictures



Dimensions

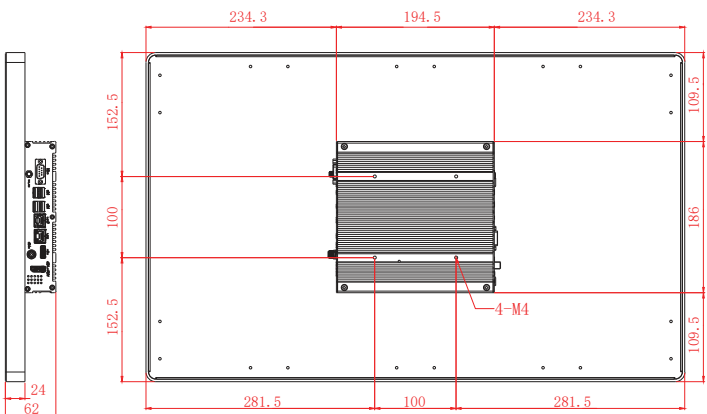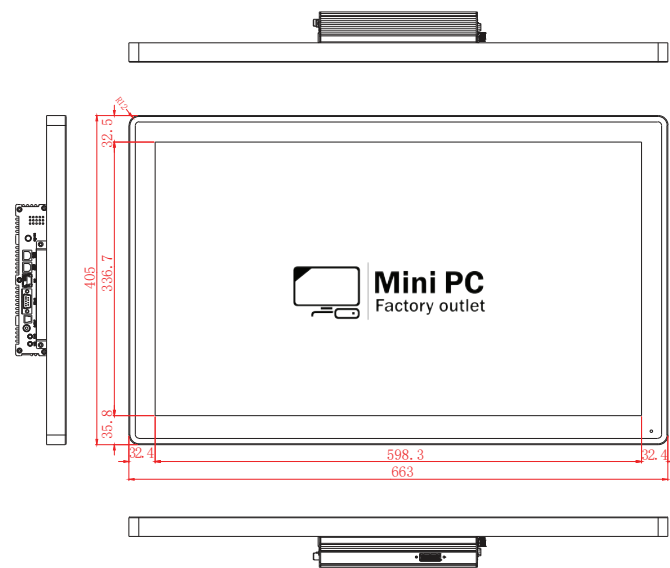

Tolerance: ± 1mm